


PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

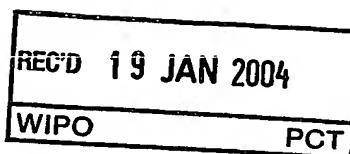

Intyg
Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Cambro Lundia AB, Lund SE
Applicant (s)

(21) Patentansökningsnummer 0203857-8
Patent application number

(86) Ingivningsdatum 2002-12-20
Date of filing

Stockholm, 2003-12-29

För Patent- och registreringsverket
For the Patent- and Registration Office


Sonia André

Avgift
Fee

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

46 46 169 189

Ink. t. Patent- och reg.verket

7107-12-20

Huvudfaxen Kossan

1

PERMSELECTIVE MEMBRANE AND PROCESS FOR
MANUFACTURING THEREOF

Technical field of the present invention

The present invention relates to a permselective asymmetric hollow fiber membrane suitable for, for example, hemodialysis, to a process for manufacturing such a membrane and to the use thereof. The membrane according to the present invention comprises at least one hydrophobic polymer and at least one hydrophilic polymer.

Membranes of the above kind present special advantages when they are used in connection with different kinds of medical treatments, such as hemodialysis, hemofiltration and hemodiafiltration. They may, however, also be used in dialysis and filtration in general, for example in water purification or dehydration.

Background of the invention

Membranes of the above kind are described in detail in, for example, EP-A-0 168 783, EP-B-0 082 433, and WO 86/00028. These membranes are manufactured from polymeric synthetic materials, they have asymmetric structure with high diffusive permeability (clearance) and have water filtration capability with ultrafiltration in the range of low flux to high flux. In EP-A-0 305 787, a 3-layer structure membrane and filter with corresponding performance, is disclosed.

The membranes according to prior art are well performing, but still have some space for improvement and optimization. The areas of improvable properties are that the fibers are difficult to handle, they stick together and adhere to each other, which cause problems during

manufacturing of dialysers, specifically when potting them in polyurethane (PUR). Further, the permeability of the fibers is still improvable. Thus, the diffusive permeability (clearance) for different molecular weight substances in the range of urea can be improved, as well as to a higher extent the permeability for substances with middle molecular weight range, like β_2 -M of factor D and others, but with low albumin permeability.

To achieve a high permeability for the substances with low and middle molecular weight on the one hand and on the other hand have a low permeability for albumin, is one of the requirements put on dialysis membranes. This characteristic is called "selectivity". The selectivity of prior art membranes still needs to be improved.

Summary of the invention

The object of the present invention is to improve hollow fiber membranes comprised of at least one hydrophobic polymer and at least one hydrophilic polymer, being suitable for, for example, hemodialysis. This object is achieved by a hollow membrane with an outer surface having pores in the size range of 0,5 to 5 μm and having number of said pores in the range of 10 000 to 150 000 pores per mm^2 , preferably in the range of 20 000 to 100 000 pores per mm^2 .

A further object of the present invention is to provide a process for the preparation of the membrane according to the present invention.

This object is achieved by a solvent phase inversion spinning process, comprising the steps of

a) said at least one hydrophobic polymer and said at least one hydrophilic polymer are dissolved in at least one solvent to form a polymer solution,

46 46 169 189

Ink. t. Patent- och reg.verket

2002-12-20

3

Huvudfoxen Kassen

b) said formed polymer solution is extruded through an outer ring slit of a nozzle with two concentric openings,

5 c) a center fluid is extruded through the inner opening of the nozzle, thereafter

d) said membrane is washed and preferably dried. According to the present invention the polymer solution coming out through the outer slit opening is, on the outside of the precipitating fiber, exposed to a humid
10 steam/air mixture.

Yet another object of the present invention is to provide use of the membrane according to the invention in hemodialysis, hemodiafiltration, hemofiltration, and in dialysis and filtration in general, for example for water
15 purification or dehydration.

Other objects, features, advantages and preferred embodiments of the present invention will become apparent from the following detailed description when taken in conjunction with the enclosed scanning micrographs and
20 the appended claims.

Detailed description of the invention

The present invention improves the deficiencies of prior art membranes by a membrane with a unique outer
25 surface of the hollow fiber membranes.

The outer layer is characterized by homogenous and open pore structure with a defined surface roughness. The openings of the pores are in the size range of 0,5-3 μm , further the number of pores on the outer surface is in
30 the range of 10 000 to 150 000 pores per mm^2 , preferably in the range of 20 000 to 100 000 pores per mm^2 . In the enclosed scanning micrographs you can see micrograph pictures of the outer surface of a hollow fiber according

to the invention (Fig. 1 and Fig. 2), where you clearly see the pores of the outer surface. In Fig. 3, you can see the outer surface of a hollow fiber, which is not according to the invention.

5 An outer surface like the one according to the present invention provides for many advantages.

One advantage is that it provides for a hollow fiber membrane, which is non-sticky and is easy to handle. This leads to less cracks and holes in the fibers during the manufacturing process, which in turn leads to less scrap in the manufacturing process.

10 Another advantage is that the hollow fiber has less tendency to adhere to the hollow fibers lying close to it in the bundle, this due to the high numbers of pores over the surface. Thus, the dialysate surrounding the hollow fibers during use has enhanced access to the hollow fibers when they are less inclined to adhere to each others, and during the potting of the hollow fibers the potting material, usually PUR, also has enhanced access to the individual hollow fibers providing a proper and more reliable potting around each hollow fiber.

20 Still another advantage is that the high numbers of pores gives enhance access for the polyurethane (PUR) during potting to penetrate through the membrane outside part into the structure of the membrane. The penetration of PUR into the structure gives a safe fixation of the membrane and herewith a leakage free potting of fibers.

25 This specific surface on the outside of the hollow fiber is achieved by modifying the spinning polymer solution composition only in the outer section of the hollow fiber membrane wall by penetration of water from a very specific steam/air atmosphere into the first 1-15 μm of polymer solution layer just before the precipitation

5

from the inside arrives at this layer. The penetration occurs in less than 0,5 seconds.

The surrounding of the fiber when the fiber is built up after the nozzle needs determined conditions, like humidity, temperature, volume of steam flux, defined selected composition of the polymer solution, viscosity, temperature and a certain composition and condition of the center fluid. This from two sides performed precipitation of the fiber (from the inner and outer side) allows achieving the structure as described above.

In a preferred embodiment of the present invention, the membrane has a unique and very specific four-layer structure having a diffusive permeability of urea of $15-17 \times 10^{-4}$ cm/sec measured at 37°C. The diffusive permeability was measured according to E. Klein, F. Holland, A. Lebeouf, A. Donnaud, J.K. Smith, "Transport and Mechanical Properties of Hemodialysis Hollow Fibers", Journal of Membrane Science 1 (1976) 371-396, especially pages 375-379. In Fig. 4, a scanning micrograph is shown over this preferred four-layer structure. The inner layer of the four-layer structure, i.e. the blood contacting layer and the inner surface of the hollow fiber membrane, is a separation layer in form of a dense rather thin layer having, in a preferred embodiment, a thickness less than 1 μm and a pore size in the nano-scale range. To achieve high selectivity the pore channels with the responsible pore diameters are short ($<0,1 \mu\text{m}$). The pore channel diameter has a very low variation in size.

Pore size can be made in different ranges, e.g. for a low flux membrane in the range of 5-10 nm, and for a high flux membrane between 5 and 20 nm, preferably 7 to 12. This different pore size creates a membrane which has a cut off e.g. for low flux of about 5 000 Dalton and for

This four-layer design together with the avoiding of fiber cracks and leakages give a high selectivity, which means, a high potential to separate molecules, which are close in their size, for example, to separate albumin from β_2 -microglobulin and Factor D.

A preferred embodiment of the membrane according to the present invention consists of 65-95 % by weight of said at least one hydrophobic polymer and 5-35 % by weight of said at least one hydrophilic polymer.

5 Said at least one hydrophobic polymer is preferably chosen from the group consisting of polyamide (PA), polyaramide (PAA), polyarylethersulphone (PAES), polyethersulphone (PES), polysulphone (PSU), polyarylsulphone (PASU), polycarbonate (PC), polyether, 10 polyurethane (PUR), polyetherimide and copolymers of said polymers, preferably polyethersulphone or a mix of polyarylethersulphone and polyamida.

Said at least one hydrophilic polymer is preferably chosen from the group consisting of polyvinylpyrrolidone 15 (PVP), polyethylene glycol (PEG), polyglycolmonoester, water soluble cellulosic derivates, polysorbate and polyethylene-polypropylene oxide copolymers, preferably polyvinylpyrrolidone.

In a preferred embodiment of the process according 20 to the present invention the temperature of the humid steam/air mixture is at least 15°C, preferably at least 30°C, and at most 75°C, preferably at most 60°C.

Further, the humidity in the humid steam/air mixture is between 60 and 100%.

25 In another preferred embodiment of the present invention the humid steam/air mixture further comprise a solvent in a content of between 0,5 and 5%.

The polymer solution, used in the process of the present invention preferably consists of 10-20 % by 30 weight of the at least one hydrophobic polymer, 3-11 % by weight of the at least one hydrophilic polymer, 66-86% by weight solvent and 1-5 % by weight suitably additives. Suitably additives comprise for example in one preferred

46 46 169 189

Ink. i Patent- och reg.verket

12-20

Huvudfoxen Kassan

8

embodiment coagulation fluid chosen from the group of water, glycerol and/or other alcohols.

In one preferred embodiment the solvent is chosen from the group comprising n-methylpyrrolidon (NMP),
5 dimethylacetamide (DMAC), dimethylsulfoxide (DMSO), dimethylformamide (DMF), butyrolactone and mixtures of said solvents.

In one preferred embodiment said center fluid includes a part of said at least one hydrophilic polymer.
10 Further, it could include at least one of the above-mentioned solvents and precipitation medium chosen from the group of water, glycerol and other alcohols. Most preferably the center fluid consist of 45-70 % by weight precipitation medium, 30-55 % by weight of solvent and 0-
15 5 % by weight of said at least one hydrophilic polymer.

The present invention will now be described in more detail in the examples below. The examples are only given by way of illustration and are not to be interpreted as limiting the scope of protection of the present
20 invention.

Example 1

A polymer solution is prepared by mixing 13,5% of polyarylethersulfone, 0,5% of polyamide, 7,5% of PVP K30
25 and 78,5% of NMP. A mixture of 59% water and 41% NMP serves as center fluid. The viscosity of the polymer solution, measured at a temperature of 22 °C, is 4,230 mPas.

Center fluid is heated to 55°C and pumped towards a
30 two-component hollow fiber spinneret. The polymer solution is leaving the spinneret through an annular slit with an outer diameter of 0,5 mm and an inner diameter of 0,35 mm. The center fluid is leaving the spinneret in the

center of the annular polymer solution tube in order to start the precipitation of the polymer solution from the inside and to determine the inner diameter of the hollow fiber.

- 5 At the same time the two components (polymer solution and center fluid) are entering a space separated from the room atmosphere. The space is called spinning shaft. A mixture of steam (100°C) and air (22°C) is injected into the spinning shaft. The temperature in the spinning shaft is adjusted by the ratio of steam and air at 49°C and a relative humidity of 98%. The length of the spinning shaft is 890 mm. By the aid of gravity and a motor-driven roller, the hollow fiber is drawn from top to bottom, from spinneret through the spinning shaft into a water bath in vertical direction. The spinning velocity is 50 m/min. The hollow fiber is subsequently led through a cascade of water bathes and temperatures increasing from 20 to 90°C. The wet hollow fiber membrane leaving the water-rinsing bath is dried in a consecutive online drying step. After a texturizing step, the hollow fiber is collected on a spinning wheel in the shape of a bundle. After introducing the bundle into a dialyser housing, it is potted with polyurethane, ends are cut, on both sides of the dialyser a header is fixed to the housing, the dialyser is rinsed with hot water and dried with air. During this last drying step, an amount of 17 g of residual water per m² effective membrane area is left on the dialyser. After labeling and packaging, the dialyser is steam-sterilized within the package in an autoclave at 121°C for 25 min.

A scanning micrograph of the outer surface of the hollow fiber according to example 1 is shown in Fig. 1.

10

The hollow fiber according to this example had 62 500 pores in the size of 0,5 to 3 μm per mm^2 .

5 Example 2

Hollow fibers were manufactured according to example 1 with the exception that less steam was used in the spinning shaft. The temperature in the spinning shaft was adjusted by the ratio of steam and air at 37°C and a
10 relative humidity of 84%.

A scanning micrograph of the outer surface of the hollow fiber according to example 2 is shown in Fig. 2. The hollow fiber according to this example had 18 700 pores in the size of 0,5 to 3 μm per mm^2 .

15

Example 3

Hollow fibers were manufactured according to example 1 with the exception that no steam was used in the
20 spinning shaft. The temperature in the spinning shaft was 26 °C and the relative humidity was 55%.

A scanning micrograph of the outer surface of the hollow fiber according to example 3 is shown in Fig. 3.

25

The hollow fibers produced according to the examples 1 to 3 were then evaluated concerning scrapped fibers bundles, clearance urea and selectivity myoglobulin-/albumin. The results are presented in the table below.

30 The method used for determining clearance urea and selectivity myoglobulin/albumin (by measuring sieving coefficients) was EN 1283.

11

Examples 1 and 2 are according to the invention, while example 3 not is according to the invention and is only given for comparison.

Example	Scrapped fiber bundles (%)	Clearance urea ml/min	Selectivity myoglobin- /albumin
1	0,1	272	16
2	6	252	8
3	48	208	5

5

The advantages of the membrane according to the present invention over prior art are that it has higher selectivity, higher diffusive permeability, improved handling properties, improved potting properties, high versatility for different types of membranes (low flux, mid flux and high flux etc.) and shows a higher rate of defect-free fibers, although there are high asymmetries and high numbers of weight in the membrane structures.

It will be readily apparent to one skilled in the art that various substitutions and modifications may be made to the present invention disclosed herein without departing from the scope and spirit of the present invention.

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

46 46 169 189

Ink. t. Patent- och registrat

2001-12-20

Huvudkontor Kungälv

12

CLAIMS

1. A permselective asymmetric hollow fiber membrane being suitable for, for example, hemodialysis, comprised
5 of at least one hydrophobic polymer and at least one hydrophilic polymer, characterized in that an outer surface of the hollow fiber membrane has pores in the range of 0,5-3 μm , and that the numbers of pores on the outer surface are in the range of 10 000 to 150
10 000 pores per mm^2 , preferably in the range of 20 000 to 100 000 pores per mm^2 .
2. A membrane according to claim 1, wherein said membrane has a four layer structure comprising a first inner separation layer in form of a dense rather thin
15 layer, a second layer in the form of a sponge structure, a third layer in form of a finger structure, and a fourth outer layer in form of a sponge layer having the outer surface according to claim 1.
3. A membrane according to claim 2, wherein said
20 membrane has a diffusive permeability of urea of 15-17 x 10^{-4} cm/sec measured at 37°C.
4. A membrane according to claim 2 or claim 3, wherein said first separation layer has a thickness less than 1 μm , said second layer has a thickness of about 1
25 to 15 μm , said third layer has a thickness of about 20 to 60 μm , and said fourth layer has a thickness of about 1 to 10 μm .
5. A membrane according to anyone of claims 1-4, wherein it consists of 65-95 % by weight of said at least
30 one hydrophobic polymer and 5-35 % by weight of said at least one hydrophilic polymer.

46 46 169 189

Ink. t. Patent. not registered

7-77-10-20

Huvudkontor: Kossen

13

6. A membrane according to anyone of the claims 1-5, wherein said at least one hydrophobic polymer is chosen from the group consisting of polyamide (PA), polyaramide (PAA), polyarylethersulphone (PAES), polyethersulphone (PES), polysulphone (PSU), polyarylsulphone (PASU), polycarbonate (PC), polyether, polyurethane (PUR), polyetherimide and copolymers of said polymers, preferably polyethersulphone.

7. A membrane according to anyone of the claims 1-6, wherein the at least one hydrophilic polymer is chosen from the group consisting of polyvinylpyrrolidone (PVP), polyethylene glycol (PEG), polyglycolmonoester, water soluble cellulosic derivates, polysorbate and polyethylene-polypropylene oxide copolymers, preferably polyvinylpyrrolidone or a mix of polyarylethersulphone and polyamide.

8. Process the preparation of a membrane according to anyone of claims 1-7 by solvent phase inversion spinning, comprising the steps of

a) said at least one hydrophobic polymer and said at least one hydrophilic polymer are dissolved in at least one solvent to form a polymer solution,

b) said formed polymer solution is extruded through an outer ring slit of a nozzle with two concentric openings,

c) a center fluid is extruded through the inner opening of the nozzle, thereafter

d) said membrane is washed and preferably dried, characterized in that the polymer solution coming out through the outer slit opening is, on the outside of the precipitating fiber, exposed to a humid steam/air mixture.

46 46 169 189

Ink i Patent- och registerat

7332-12-2 0

Huvudföreläsning

14

9. Process according to claim 8, wherein the temperature of the humid steam/air mixture is at least 15°C, preferably at least 30°C, and at most 75 °C, preferably at most 60°C.

5 10. Process according to anyone of claims 8 or 9, wherein the humidity in the humid steam/air mixture is between 60 and 100%.

10 11. Process according to anyone of claims 8-10, wherein the humid steam/air mixture comprise a solvent in a content of between 0,5 and 5%.

15 12. Process according to any of claims 8-11, wherein the polymer solution consists of 10-20 % by weight of the at least one hydrophobic polymer, 3-11 % by weight of the at least one hydrophilic polymer, 66-86 % by weight solvent and 1-5 % by weight suitable additives.

13. Process according to anyone of claims 8-12, wherein the polymer solution comprise 1-5 % by weight coagulation fluid chosen from the group of water, glycerol or other alcohols.

20 14. Process according to anyone of claims 8-13, wherein said solvent is chosen from the group comprising n-methylpyrrolidon (NMP), dimethylacetamide (DMAC), dimethylsulphoxide (DMSO), dimethylformamide (DMF), butyrolactone and mixtures of said solvents.

25 15. Process according to anyone of claims 8-14, wherein said center fluid includes a part of said at least one hydrophilic polymer.

30 16. Process according to anyone of claims 8-15, wherein said center fluid includes at least one solvent chosen from the group comprising n-methylpyrrolidon (NMP), dimethylacetamide (DMAC), dimethylsulphoxide (DMSO), dimethylformamide (DMF), butyrolactone and mixtures of said solvents.

46 46 169 189

Inkl. Patent- und Prüfungsamt

2012-12-20

Hilfsdienstleistungen

15

17. Process according to anyone of claims 8-16,
wherein said center fluid includes precipitation medium
chosen from the group water, glycerol and other alcohols.

5 18. Process according to anyone of claims 8-17,
wherein said center fluid consist of 45-70 % by weight
precipitation medium, 30-55 % by weight solvent and 0-5%
said at least one hydrophilic polymer.

10 19. Use of a membrane according to anyone of claims
1-7 in hemodialysis, hemodiafiltration, and
hemofiltration.

20. Use of a membrane according to anyone of claims
1-7 in dialysis and filtration.

15 21. Use of a membrane manufactured according to any
of claims 8-18 in hemodialysis, hemodiafiltration, and
hemofiltration.

22. Use of a membrane manufactured according to any
of claims 8-18 in dialysis and filtration.

46 46 169 189

Ink t. 12/20/2010

2010-12-20

Houdouin Kesson

16

ABSTRACT

The present invention relates to a membrane being suitable for, for example, hemodialysis. Said membrane comprises at least one hydrophobic polymer and at least one hydrophilic polymer. According to the present invention the outer surface of the hollow fiber has pores in the range of 0,5-3 μm and the numbers of pores on the outer surface are in the range of 10 000 to 150 000 pores per mm^2 , preferably in the range of 20 000 to 100 000 pores per mm^2 .

The present invention further relates to a process for the preparation of said membrane and use of said membrane in hemodialysis, hemodiafiltration and hemofiltration, and in dialysis and filtration in general, for example in water purification or dehydration.

46 46 169 189

Ink. t. Patent- och reg.verket

1998-07-08

Handwritten: Karsen

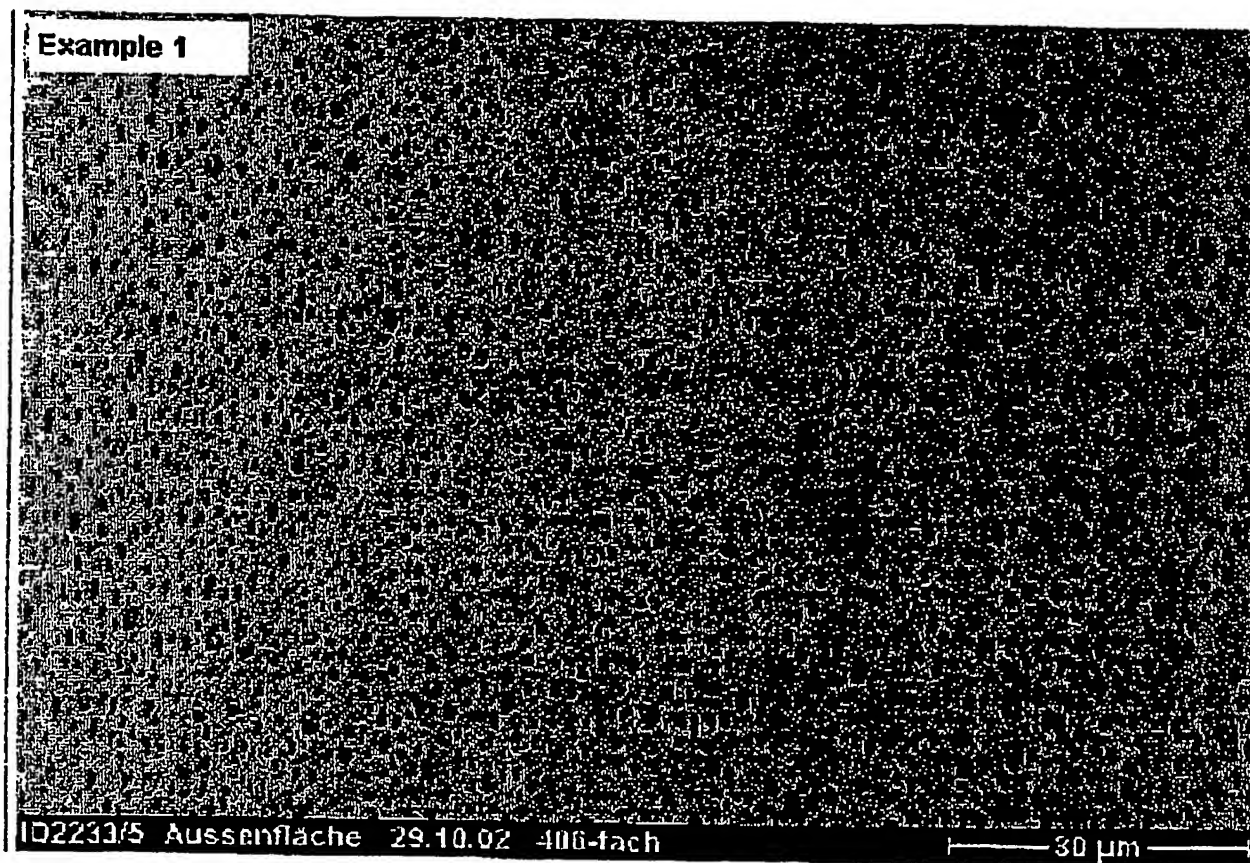


Fig. 1

46 46 169 189

Ink. 1. Patent eingereicht

2. 11.02.02

Hauptinventor: Krosch

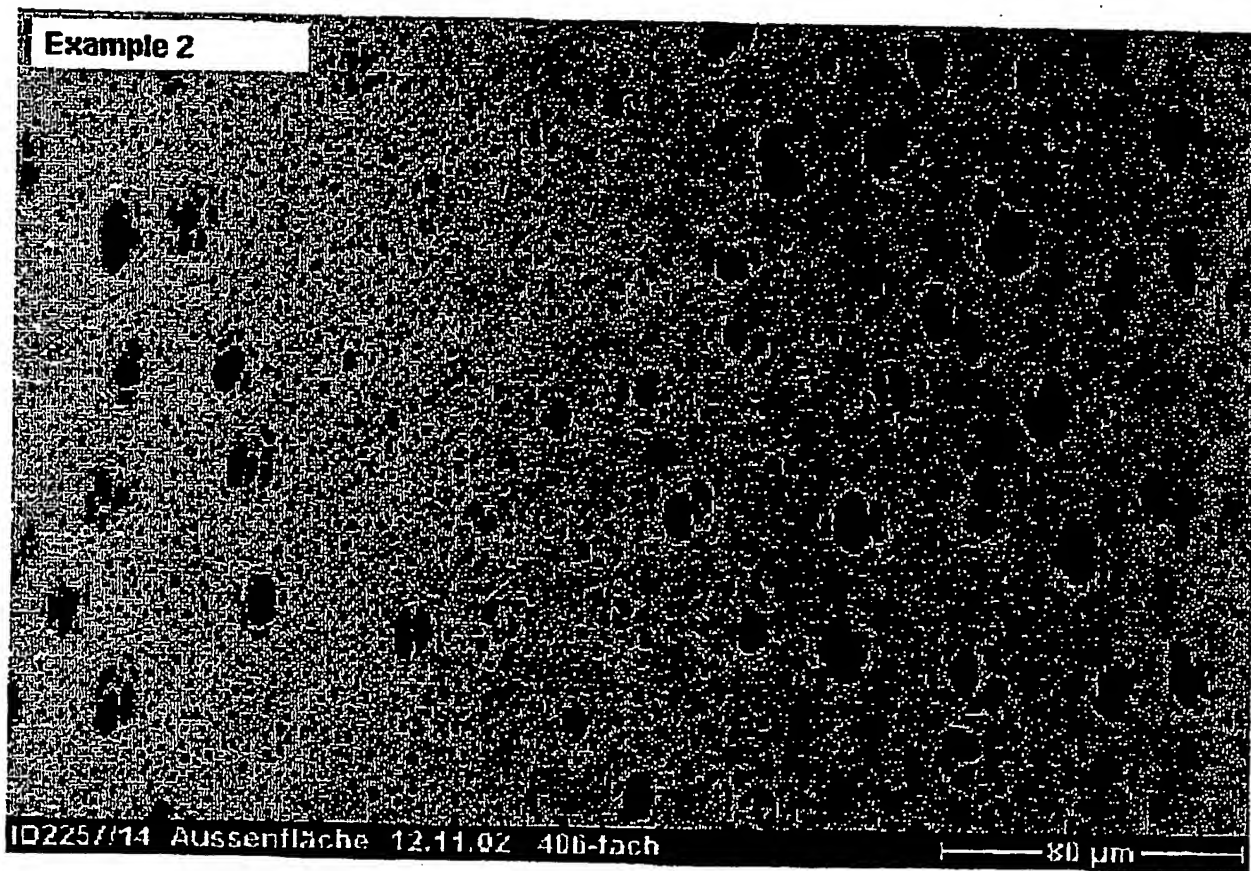


Fig. 2


46 46 169 189

Ink. 1. Patent- und Anwaltskanzlei

2002-10-20

Hauptstadt: Kopenhagen

Example 3

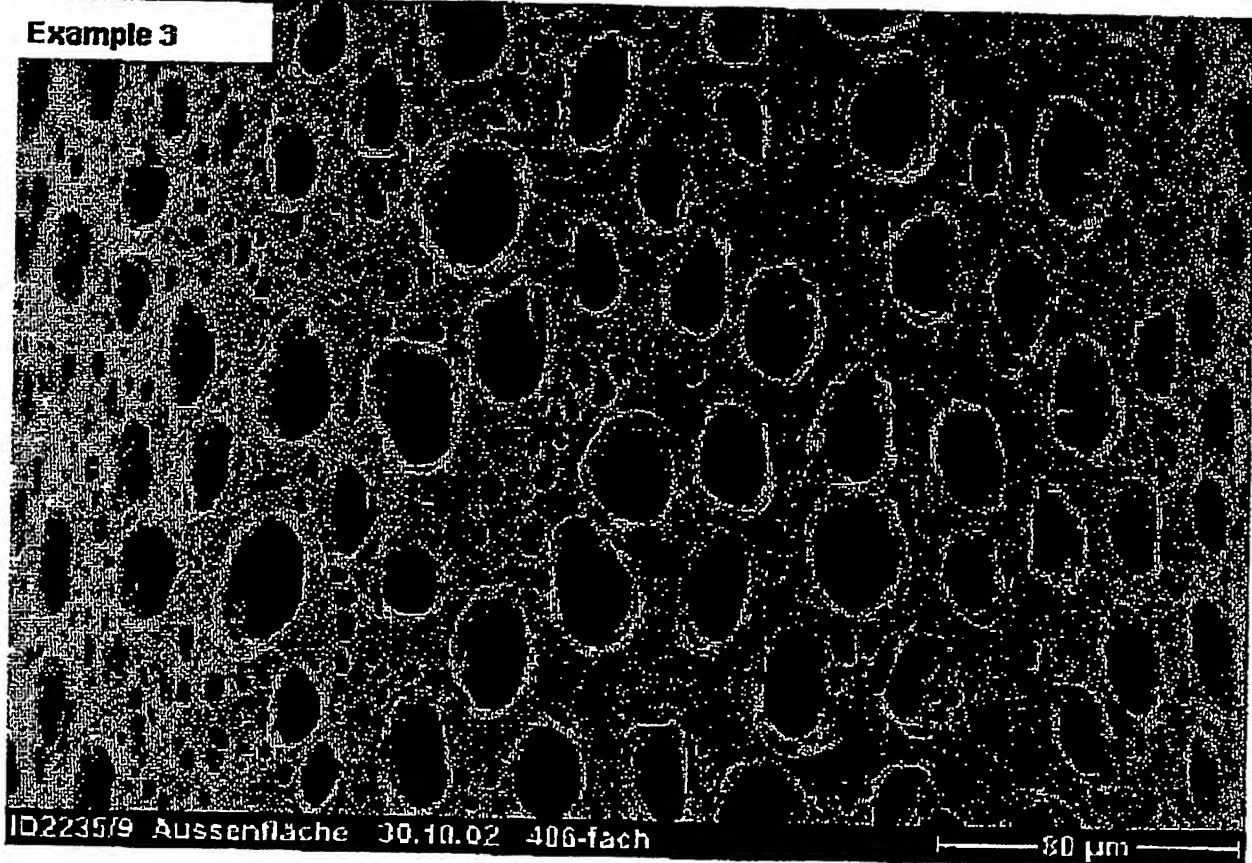

ID2235/9 Aussenfläche 30.10.02 406-fach

80 µm

Fig. 3

46 46 169 189

Ink. 1. Patent- und Registeramt

7.10.2002

Herrn Dr. G. H. H. H.

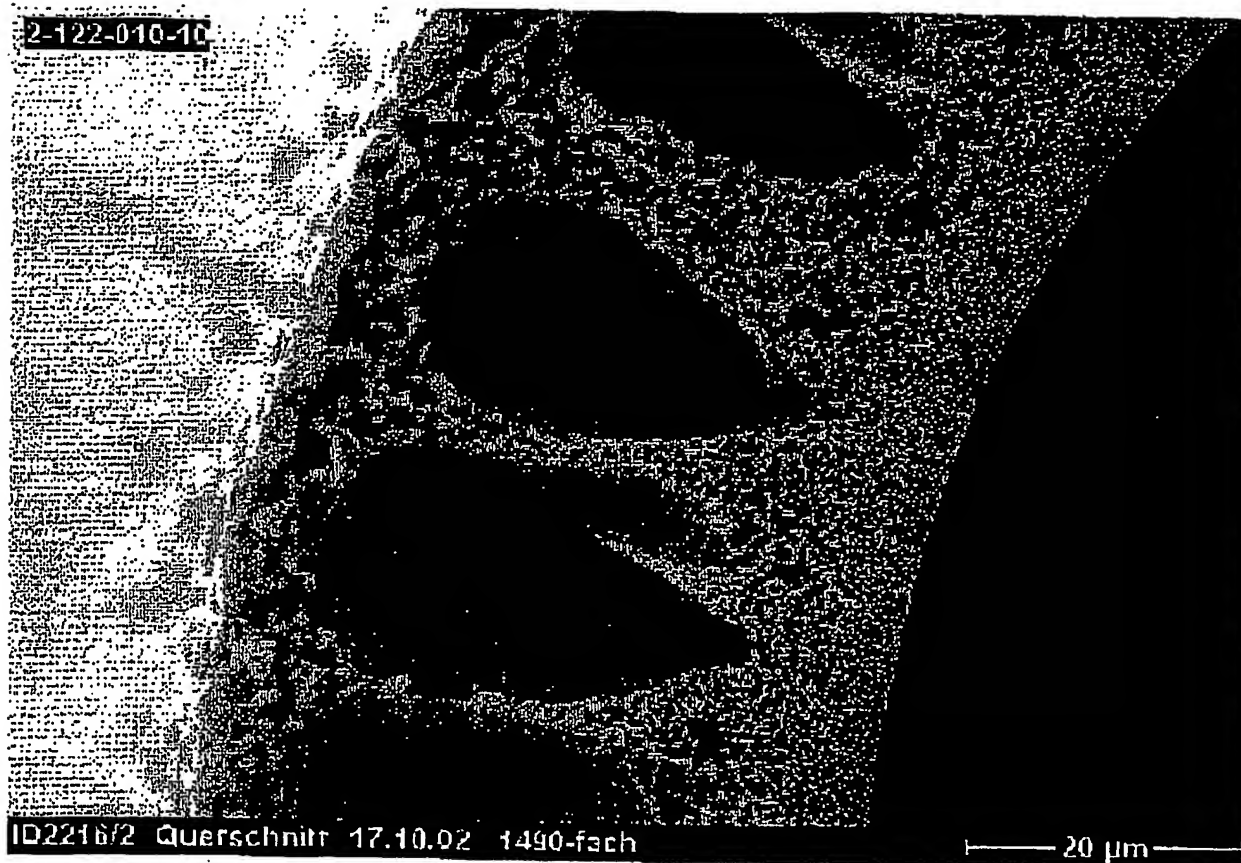


Fig. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.